

DA 4248 V D Puristic Varia

Island décor hood

with energy-efficient LED lighting and backlit controls for easy use.



- Timeless design – 47 1/4 (1198) in (mm) wide stainless steel ventilation hood
- Unique user convenience – Con@ctivity
- Motorized chimney
- Powerful – ?? on the booster setting
- Energy-efficient and quiet

EAN: 4002515990162 / Material number: 10877250 / Old Material Number: 28424855USA

Construction type	
Island ventilation hood	•
Operating modes	
Recirculated mode	air extraction
Design	
Color	Stainless steel
Variable height available as special order	•
Control panel	
Miele@home	•
Electronic controls	•
Power levels (number excl. Intensive)	3
Programmable Intensive switch-off	•
Grease filter saturation indicator	•
Programmable grease filter saturation indicator	•
Acoustic package	•
Hood in Motion	•
User convenience	
Run-on time 5/15 min.	•
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher safe stainless-steel grease filters (10-ply)	6
Lighting	
LED ClearView lighting	•
Number x W	4 x 3 W
Light intensity in Lx	600 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
Blower	
Dual-action blower	•
AC motor	•
Extraction	
Air throughput	Values upon request
Safety	
Safety shut-off	•
Technical data	
Canopy width in in.(mm)	47 1/4 (1198)
Overall min. height for vented and external in in. (mm)	29 3/4 (755)
Overall max. height for vented and external in in. (mm)	41 1/4 (1045)
Canopy height in in.(mm)	2 7/8 (70)
Canopy depth in in.(mm)	27 1/2 (698)
Minimum height above electric hobs in mm	24 1/8 (610)
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Net weight in lbs. (kg)	109 (49.0)
Length of electrical wire in ft (m)	0 (0.0)
Total connected load in kW	0.51
Fuse rating in A	15
Hard-wired	•

DA 4248 V D Puristic Varia

Island décor hood

with energy-efficient LED lighting and backlit controls for easy use.




EAN: 4002515990162 / Material number: 10877250 / Old Material Number: 28424855USA

Voltage in V	120
Frequency in Hz	60
Number of phases	1
Installation notes	
Vent connection at top	•
Diameter of vent connection in in. (mm)	6 (150)
Telescopic chimney	•
Accessories supplied	
Non-return flap	•
Communication module for Con@ctivity XKM 2000 DA	XKS 3000 Z
Optional accessories	
OdorFree charcoal filter	No

DA 4248 V D Puristic Varia

Island décor hood

with energy-efficient LED lighting and backlit controls for easy use.

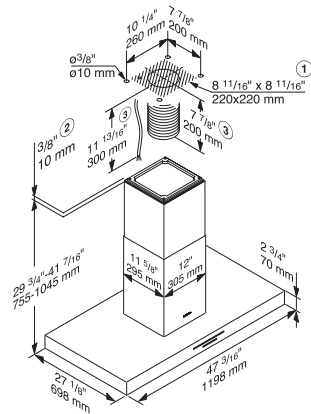

DA 4248 V (Installation drawing) USA

1) Installation area/site, 2) Installation alternatively with spacer frame, 3) A supply lead, and for vented mode flexible vent ducting, must be pre-fitted for the connection in the ceiling to the connection of the cooker hood.