

H 7660 BP AM

24" oven

in a perfectly combinable design with roast probe and BrilliantLight.



- Touch display with proximity sensor – M Touch S + MotionReact
- Minimal cleaning effort – Self Clean and Self Clean ready
- Beautifully light dough and browned crusts – Moisture Plus
- Ensures your food won't overcook – TasteControl
- Network-enabled WiFi appliance – Miele@home

EAN: 4002516483823 / Material number: 11804810 / Old Material Number: 22766045USA

| Construction type and design                                         |                   |
|----------------------------------------------------------------------|-------------------|
| Built-in wall oven                                                   | •                 |
| PureLine                                                             | •                 |
| Appliance color                                                      | Clean Touch Steel |
| Convenience features                                                 |                   |
| TasteControl                                                         | •                 |
| Rapid PreHeat                                                        | •                 |
| Roast probe                                                          | With cable        |
| Keep-warm function                                                   | •                 |
| Crisp function                                                       | •                 |
| Operating modes                                                      |                   |
| Auto roast                                                           | •                 |
| Defrost                                                              | •                 |
| MasterChef automatic programs                                        | •                 |
| Browning                                                             | •                 |
| Bake                                                                 | •                 |
| Broiling operating modes                                             | •                 |
| Maxi Broil                                                           | •                 |
| Broil                                                                | •                 |
| Intensive Bake                                                       | •                 |
| Moisture Plus                                                        | •                 |
| Moisture Plus with Convection Bake                                   | •                 |
| Moisture Plus with Surround                                          | •                 |
| Moisture Plus with Intensive                                         | •                 |
| Moisture Plus with AutoRoast                                         | •                 |
| Slow roast                                                           | •                 |
| Surround                                                             | •                 |
| Convection Roast                                                     | •                 |
| Special modes                                                        | •                 |
| Convenience features                                                 |                   |
| Precise oven temperature regulation in °F (°C)                       | 85-575 (30-300)   |
| Control panel                                                        |                   |
| Date display                                                         | •                 |
| Minute minder                                                        | •                 |
| Default temperatures                                                 | •                 |
| User convenience                                                     |                   |
| Networking with Miele@home                                           | •                 |
| Control panel                                                        | M Touch S         |
| MotionReact: Light comes on when movement is detected                | •                 |
| MotionReact: Display comes on when movement is detected              | •                 |
| MotionReact: Audible signal to acknowledge when movement is detected | •                 |
| MotionReact: Detection of cabinet fronts                             | •                 |
| SoftOpen                                                             | •                 |
| SoftClose                                                            | •                 |
| MultiLingua                                                          | •                 |
| MyMiele                                                              | •                 |
| Show me how                                                          | •                 |
| Timed bursts of steam                                                | •                 |

H 7660 BP AM

24" oven

in a perfectly combinable design with roast probe and BrilliantLight.



EAN: 4002516483823 / Material number: 11804810 / Old Material Number: 22766045USA

|                                                    |                |
|----------------------------------------------------|----------------|
| Timers                                             | •              |
| Time of day display                                | •              |
| Time synchronization                               | •              |
| Programming start of cooking duration              | •              |
| Programming end of cooking duration                | •              |
| Programmable cooking time                          | •              |
| Actual temperature display                         | •              |
| Audible signal when desired temperature is reached | •              |
| Favorites                                          | •              |
| Sabbath program                                    | •              |
| Individual settings                                | •              |
| Suction tube for drawing in water                  | •              |
| <b>Efficiency and sustainability</b>               |                |
| Residual heat utilization                          | •              |
| <b>Cleaning convenience</b>                        |                |
| Clean Touch Steel surface                          | •              |
| Self-cleaning                                      | •              |
| Catalyzer                                          | •              |
| Foldable broil heater element                      | •              |
| CleanGlass door                                    | •              |
| <b>Safety</b>                                      |                |
| Appliance cooling system with cool touch front     | •              |
| Safety cut-out                                     | •              |
| System lock                                        | •              |
| Door lock during self cleaning                     | •              |
| Sensor lock                                        | •              |
| <b>Technical data</b>                              |                |
| Cavity volume in cu.ft (l)                         | 2.97 (84)      |
| No. of rack levels                                 | 5              |
| Number of shelf levels oven compartment 1          | 5              |
| Number of shelf levels oven compartment 2          | 5              |
| Labeling of rack levels                            | •              |
| Oven interior lighting                             | 1 halogen spot |
| Power Rating in V                                  | 120            |
| Number of phases                                   | 1              |
| Niche width min. in inches (mm)                    | 22 1/8 (560)   |
| Niche width max. in inches (mm)                    | 22 3/8 (568)   |
| Niche height min. in inches (mm)                   | 23 1/4 (590)   |
| Niche height max. in inches (mm)                   | 23 1/2 (595)   |
| Niche depth in in. (mm)                            | 21 3/4 (550)   |
| Appliance width in in. (mm)                        | 23 1/2 (595)   |
| Appliance height in in. (mm)                       | 23 1/2 (596)   |
| Appliance depth in in. (mm)                        | 22 1/2 (569)   |
| Weight in lbs. (kg)                                | 102.52 (46.5)  |
| Total connected load in kW                         | 3.50           |
| Voltage in V                                       | 240/208        |
| Frequency in Hz                                    | 60             |
| Fuse rating in A                                   | 30             |
| Connection wire with plug                          | •              |
| Length of power cord in in. (m)                    | 1.80           |

H 7660 BP AM

24" oven

in a perfectly combinable design with roast probe and BrilliantLight.



EAN: 4002516483823 / Material number: 11804810 / Old Material Number: 22766045USA

#### Accessories supplied

|                                                      |   |
|------------------------------------------------------|---|
| PerfectClean universal baking tray                   | 1 |
| Self Clean ready baking and roasting rack            | 2 |
| Descaling tablets                                    | 2 |
| Self-Clean-ready FlexiClip telescopic runners (pair) | 1 |
| Removable Self Clean-ready side racks (pair)         | 1 |
| Grill and Roasting Insert with PerfectClean          | 1 |

#### Available display languages

Available display languages via MultiLingua


bahasa malaysia, dansk,  
deutsch, english, español,  
français, hrvatski, italiano,  
magyar, nederlands,  
norsk, polski, português,  
русский, română,  
slovenčina, slovenščina,  
srpski, suomi, svenska,  
türkçe, українська, čeština,  
ελληνικά,

24" oven


Technical drawing of a mechanical part with dimensions in inches and millimeters:

- Overall width:  $22 \frac{7}{8}''$  (580.3 mm)
- Overall height:  $23 \frac{7}{16}''$  (596 mm)
- Top horizontal slot width:  $21 \frac{1}{2}''$  (546 mm)
- Top horizontal slot depth:  $18 \frac{5}{8}''$  (473.5 mm)
- Top horizontal slot offset from right edge:  $4 \frac{3}{8}''$  (111.5 mm)
- Top horizontal slot offset from left edge:  $7 \frac{7}{8} / 15 \frac{1}{16}''$  ( $22'' / 23.3''$  mm)
- Top horizontal slot thickness:  $1/8''$  (3 mm)
- Top horizontal slot offset from top edge:  $5/8''$  (15.7 mm)
- Bottom horizontal slot width:  $23 \frac{7}{16}''$  (596 mm)
- Bottom horizontal slot depth:  $3 \frac{1}{16}''$  (4 mm)
- Bottom horizontal slot offset from right edge:  $1/8''$  (3 mm)
- Bottom horizontal slot offset from left edge:  $1/8''$  (3 mm)


7/8" – 22\* mm – Glas, 15/16" – 23.3\*\* mm – Edelstahl

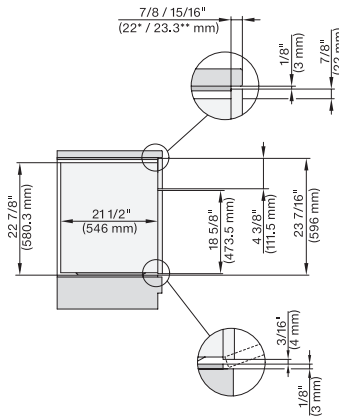


7/8" – 22\* mm – Glas, 15/16" – 23.3\*\* mm – Edelstahl

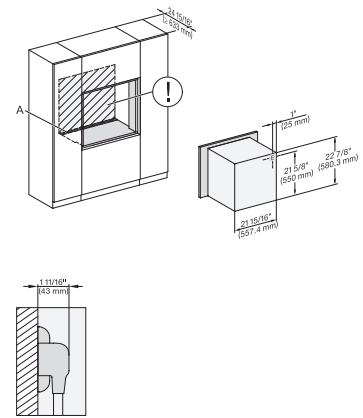


A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the Electrical and water supplies behind the appliance., E = Electric connection

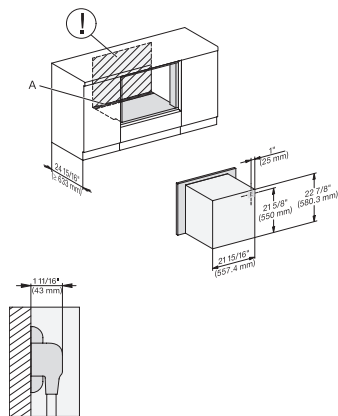

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection,

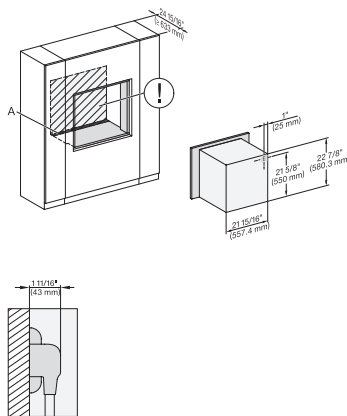

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

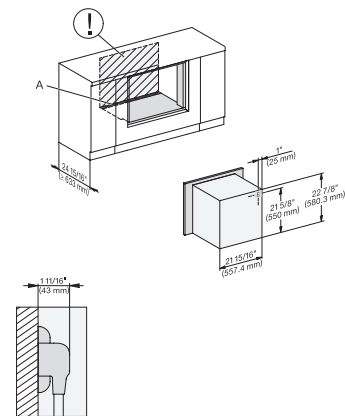


A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection,

## H 7660 BP AM


24" oven

in a perfectly combinable design with roast probe and BrilliantLight.

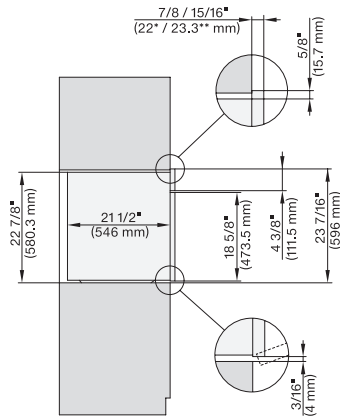


H 6x60 B(P) + EBA 6808, H 7x6x B(P) (+ EBA7808) side view, installation drawing, Proud, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

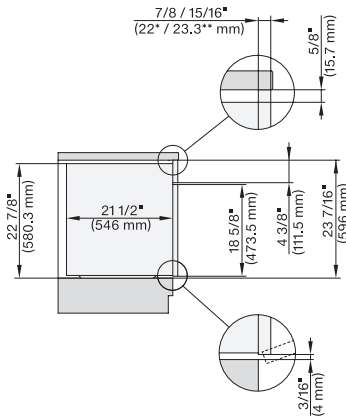


H 6x60 B(P) + EBA 6808, H7x6xBP (+EBA7868) side view built-under, installation drawing, Proud, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

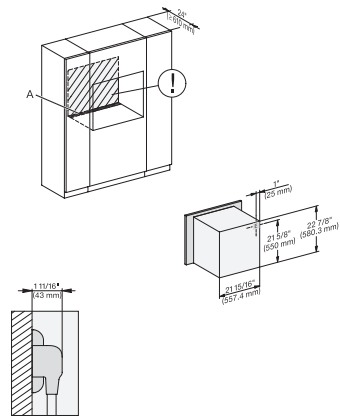


H 6x60 B(P) + EBA 6808, H 7x6xBP(+EBA7868), installation, installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

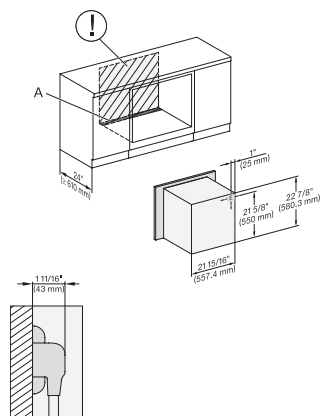


H 6x60 B(P) + EBA 6808, H7x6x(+EBA7868) installation built-under, installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection,

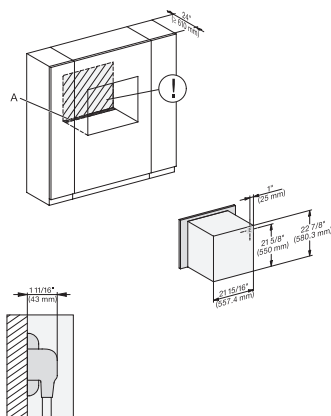

H 6x60 B(P) + EBA 6808, H7x6xBP+EBA7868, wide front installation, installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

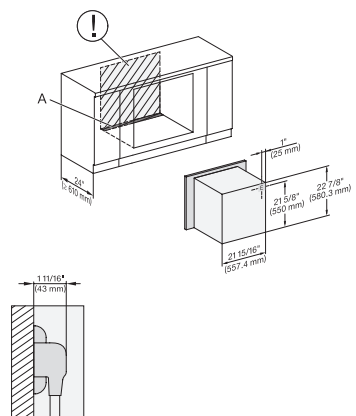


H 6x60 B(P) + EBA 6808, H7x6xBP(+EBA7868) installation of built-under with wide front, installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection,

## H 7660 BP AM


24" oven

in a perfectly combinable design with roast probe and BrilliantLight.

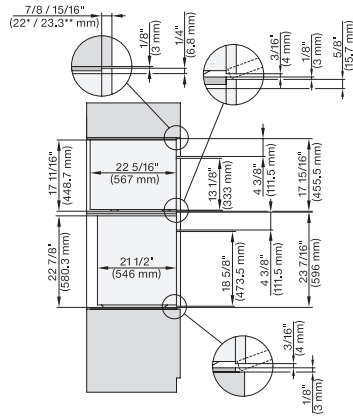


DGC6x00-1+EBA 6808, H 6560B+EBA 6808, H 6x60 BP+EBA6808, DGC7xxx, H7xxx, EBA78x8 Combi, Install. drawi., Flush inset, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

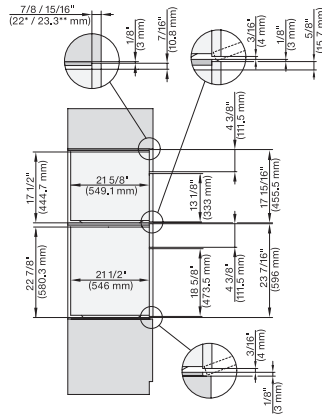


H 6560 B + EBA 6808, H 6x60 BP + EBA 6808, H 6x00 BM + EBA 6808, H7xxx, EBA 78x8 Combi, Install drawing, Flush inset, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

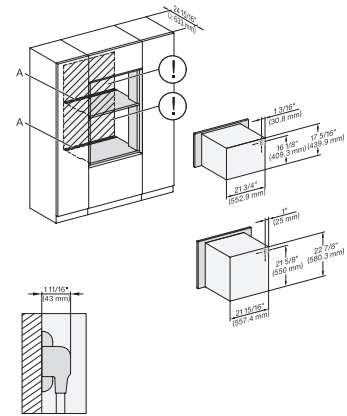


H 6560 B + EBA 6808, H 6x60 BP + EBA 6808, H 6x00 BM, H 7xxx, EBA 78x8, Installation drawing, Flush inset, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

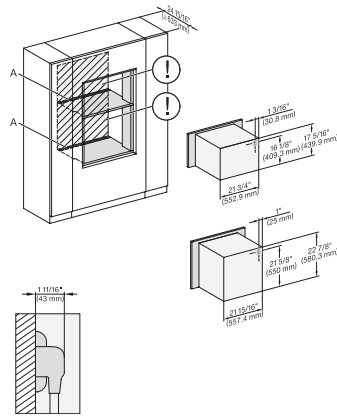


H 6560 B + EBA 6808, H 6x60 BP, H 6x00 BM, H 7xxx BM/BP, EBA 78x8, Installation drawing, Flush inset, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

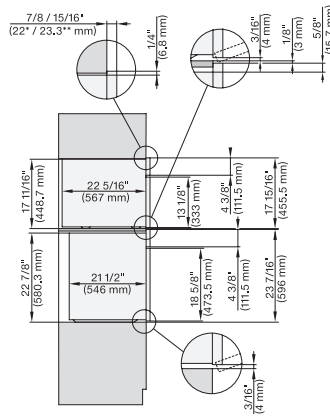

DGCxxxx-1+EBAx8x8, H6560B+EBA6808, HxxxBP+EBAx8x8, Combi, Install Drawing, Proud, Flush inset, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

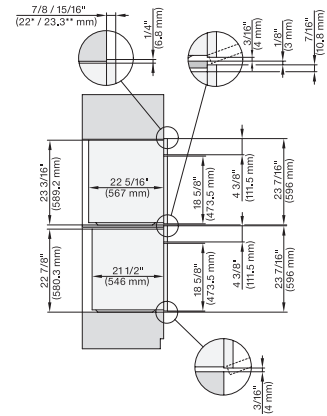


DGC6x6x(AM)+EBA6808, H6560B+EBA6808, H6x60BP+EBA6808, (DGC786x, H7x6xBP)+EBA7868, Combi, Install drawing, Proud, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

## H 7660 BP AM


24" oven

in a perfectly combinable design with roast probe and BrilliantLight.

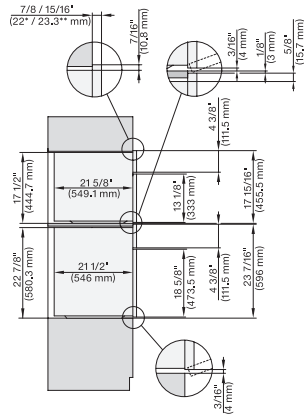


H 6560 B + EBA 6808, H 6x60 BP + EBA 6808, H 6x00 BM + EBA 6808, H7xxx+EBA7x7x, Combi, Installation drawing, Proud, NA

7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Edelstahl

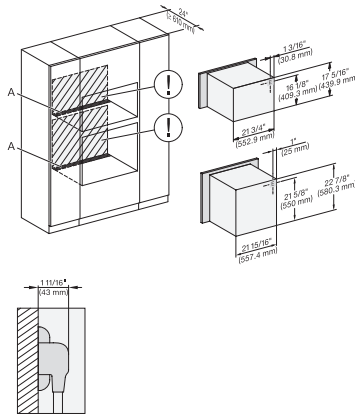


H 6560 B + EBA 6808, H 6x60 BP + EBA6808, H6x00BM + EBA6808, NA7000 Installation Combi, Installation drawing, Proud, NA

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

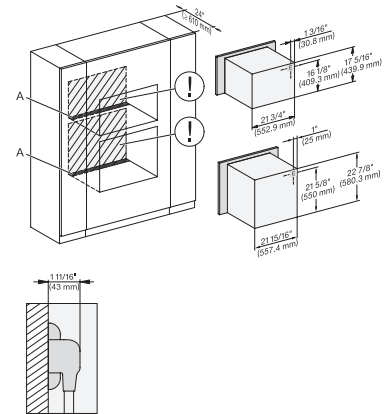


(H6560B, H6x60BP, H6x00BM) + EBA6808, NA7000 Installation Combi wide front, Installation drawing, Proud, NA


A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation, – Electrical and water supplies are recommended to be placed in adjacent cabinetry., Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

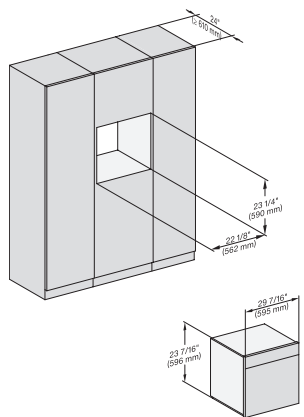


DGC786x, H7x6xBP, Einbau, 30 Zoll, Proud, 650S

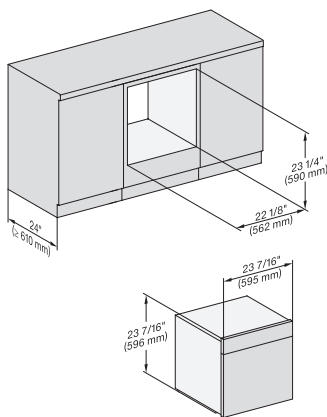


H7x6xBP, Einbau, 30 Zoll, Proud, built-under, 650S

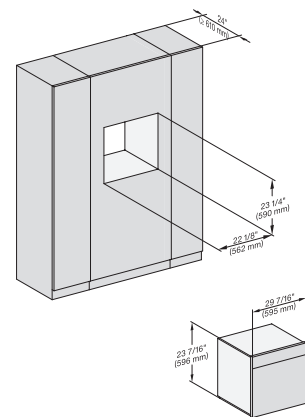


DGC786x, H7x6xBP, Einbau, 30 Zoll, Proud, wide front, 650S

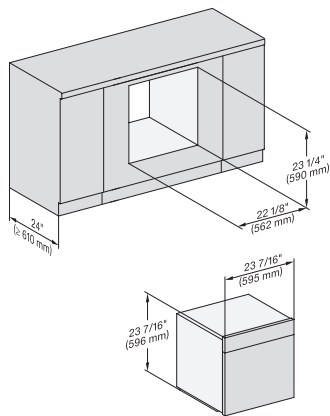

H7x6xBP, Einbau, 30 Zoll, Proud, built-under, wide front, 650S

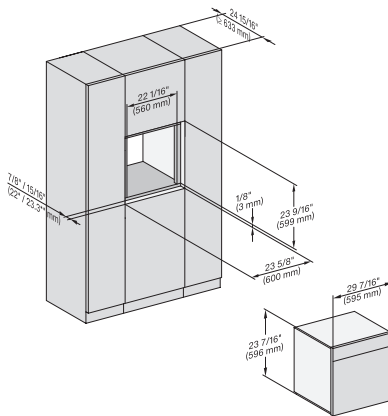

DGC786x H7x6xBP, Einbau, 30 Zoll, Flush inset, 650S  
7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Stainless steel

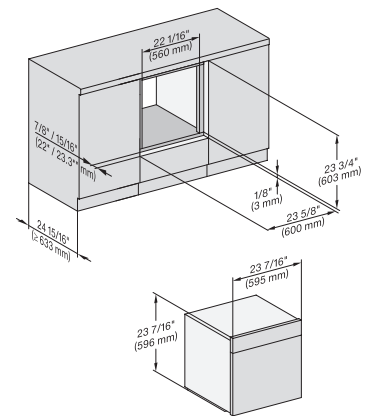


H7x6xBP, Einbau, 30 Zoll, Flush inset, built-under  
7/8" – 22" mm – Glas, 15/16" – 23.3" mm – Stainless steel

## H 7660 BP AM


24" oven

in a perfectly combinable design with roast probe and BrilliantLight.

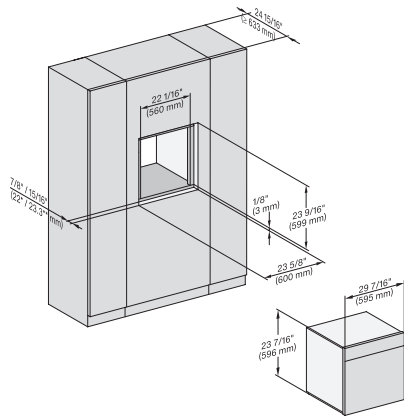


DGC7x8x, H7x6xBP, Einbau, 30 Zoll, Flush inset, breite Font, 650S

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

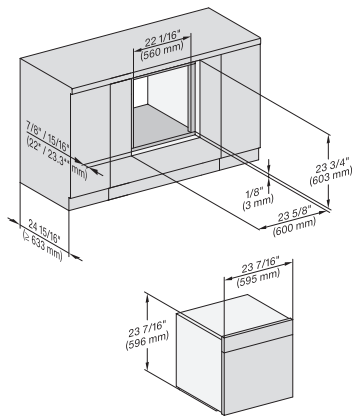


H7x6xBP, Einbau, 30 Zoll, Flush inset, built-under, breite Font, 650S

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

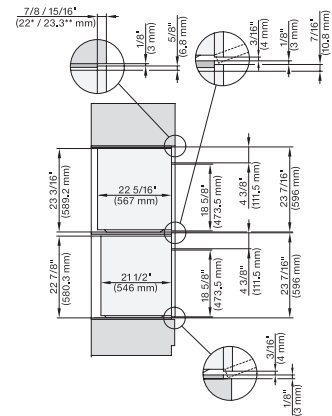


DGC786x(+EBA7848), H7x6xBP(+EBA7848), side view, 30 Zoll, Flush inset, combi, XXL, 650S

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

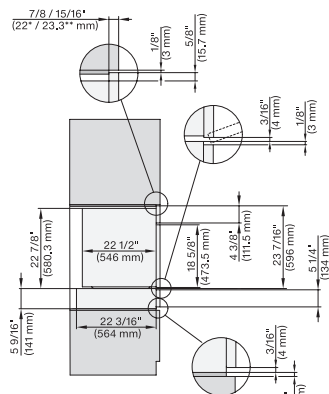


H7x6xBP+EBA7848, ESW7x10, EVS7010, side view, 30 Zoll, Flush inset, combi, 650S, ESW

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

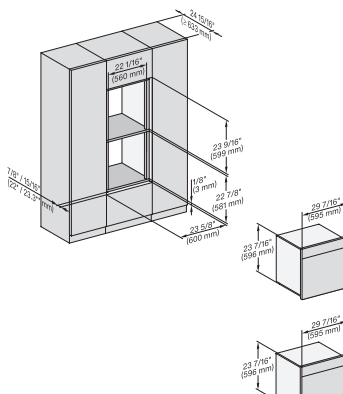


DGC786x, H7x6xBP, Einbau, 30 Zoll, Flush inset, combi, XXL 650S

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

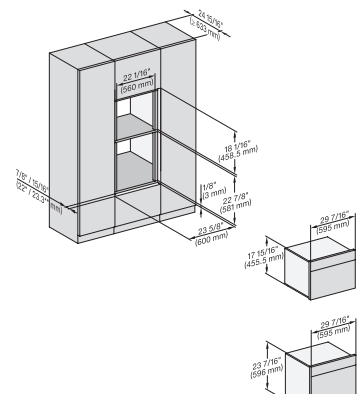


DGC7x4x, H7x40BM, H7x6xBP, Einbau, 30 Zoll Flush inset, combi, 650S, 450S

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

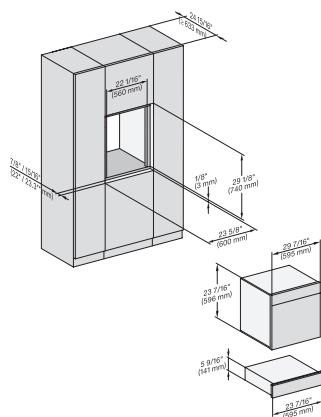


H7x6xBP+EBA7848, ESW7x10, EVS7010, Einbau, 30 Zoll, Flush inset, combi, 650S, ESW

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

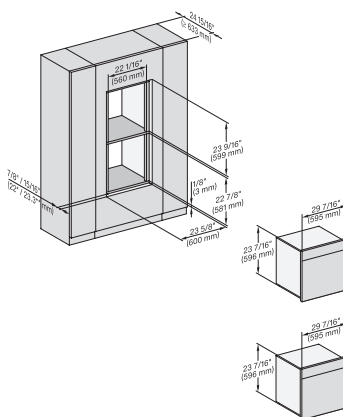

DGC786x, H7x6xBP, Einbau, 30 Zoll, Flush inset, combi, wide front, XXL, 650S

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

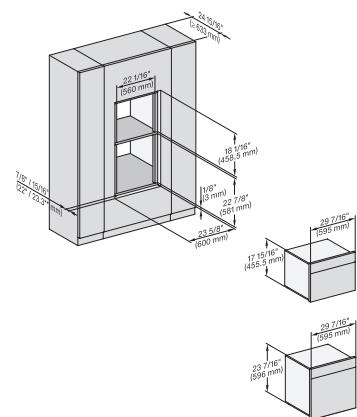


DGC7xxx, H7x40BM, H7x6xBP, Einbau, 30 Zoll, Flush inset, combi, wide front, 650S, 450S

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

H 7660 BP AM


24" oven

in a perfectly combinable design with roast probe and BrilliantLight.

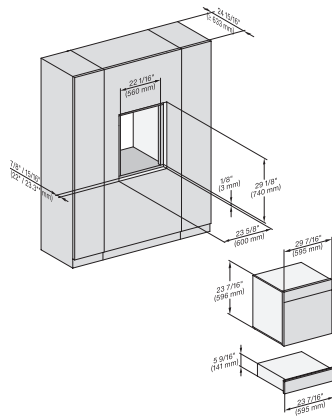


H7x6x+EBA7868, ESW7x10, EVS7010, Einbau, 30 Zoll, Flush inset, wide front, 650S

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

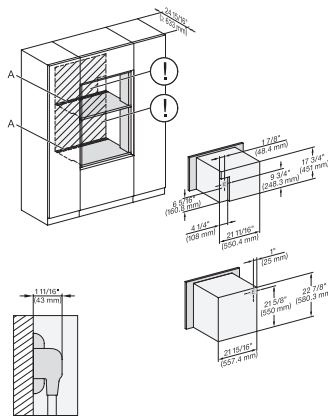


DGC7x4x(+EBA7848), H7x6xBP(+EBA7848), Installation, 30 Zoll, Flush inset, combi, XL, 650S

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

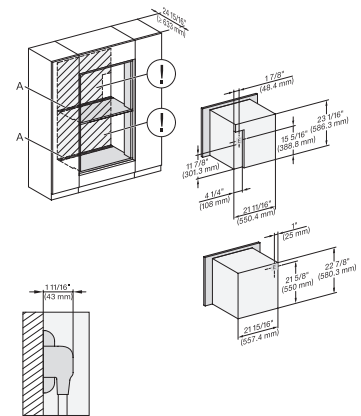


DGC786x+EBA7868, H7x6xBP(+EBA7848), Installation, 30 Zoll, Flush inset, combi, XXL, 650S

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

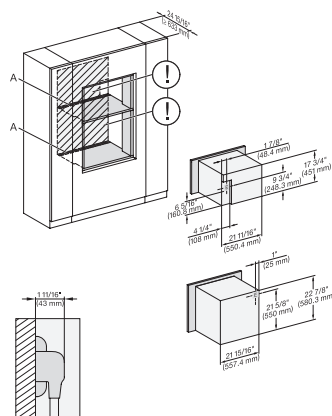


DGC7x4x(+EBA7848), H7x6x(+EBA7848), Installation, 30 Zoll, flush inset, combi, wide front, XL, 650S

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

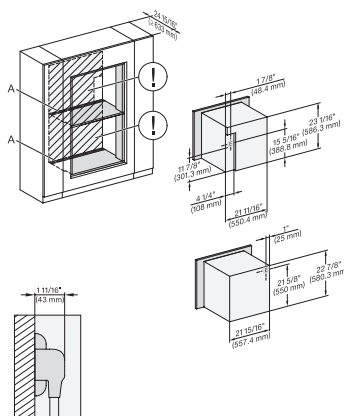

DGC786x(+EBA7848), H7x6xBP(+EBA7848), Installation, 30 Zoll, Flush inset, combi, wide front, 650S, XXL

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance. E = Electric connection

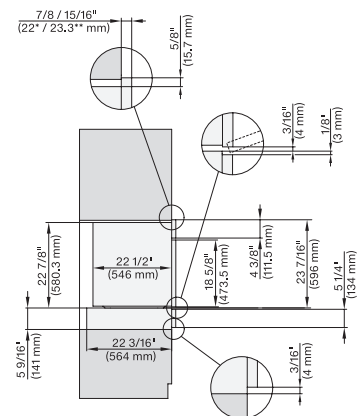


H7x6xBP+EBA7848, ESW7x10, EVS7010, side view, 30 Zoll, Proud, combi, 650S

7/8" – 22" mm – Glass, 15/16" – 23.3" mm – Stainless steel

## H 7660 BP AM


24" oven

in a perfectly combinable design with roast probe and BrilliantLight.

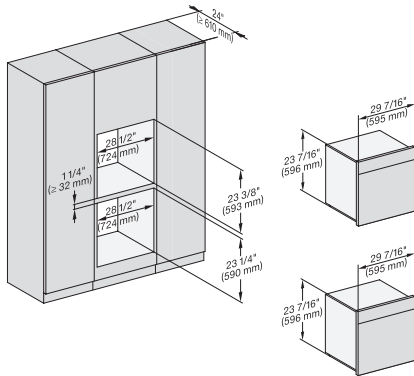


DGC786x, H7x6BP, Einbau, 30 Zoll, Proud, combi, XXL, 650S

7/8" – 22" mm – Glass, 15/16" – 23.3\*\* mm – Stainless steel

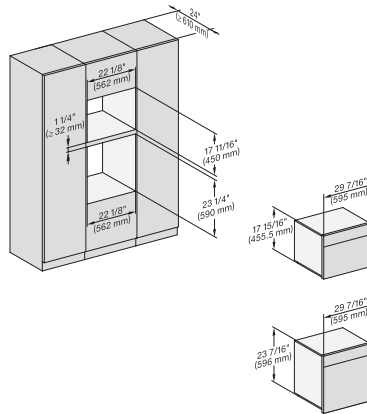


DGC7xxx, H7x4x6M, H7x6x6BP, Einbau, 30 Zoll, Proud, combi, 650S, 450S

7/8" – 22" mm – Glass, 15/16" – 23.3\*\* mm – Stainless steel

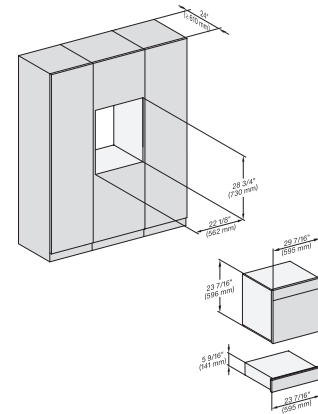


H7x6x6BP+EBA7848, ESW7x10, EVS7010, Einbau, 30 Zoll, Proud, combi, 650S


7/8" – 22" mm – Glass, 15/16" – 23.3\*\* mm – Stainless steel

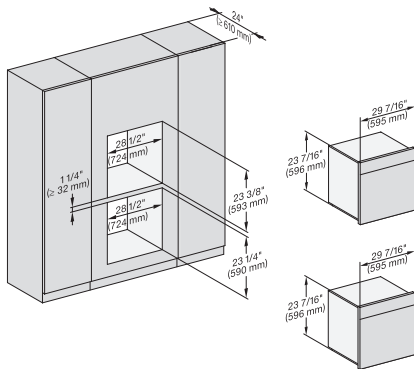

DGC786x, H7x6x6BP, Einbau, 30 Zoll, Proud, combi, wide front, XXL

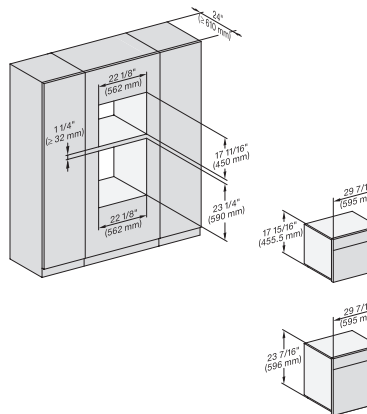

DGC7x4x, H7x40Bm, H7x6x6BP, Einbau, 30 Zoll, Proud, combi, wide front, 650S, 450S

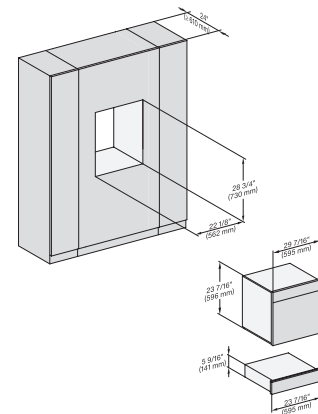


H7x6x6BP+EBA7848, ESW7x10, EVS7010, Einbau, 30 Zoll, Proud, combi, wide front, 650S

H 7660 BP AM


24" oven

in a perfectly combinable design with roast probe and BrilliantLight.

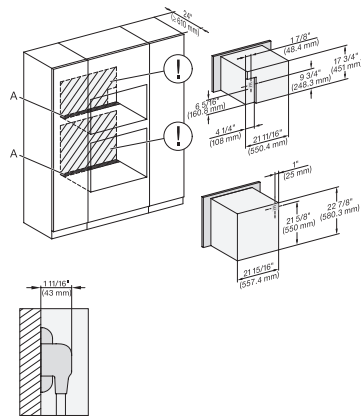


DGC7x4x(+EBA7848), H7x6x(+EBA7848), Installation, 30 Zoll, Proud, combi, XL, 650S

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection

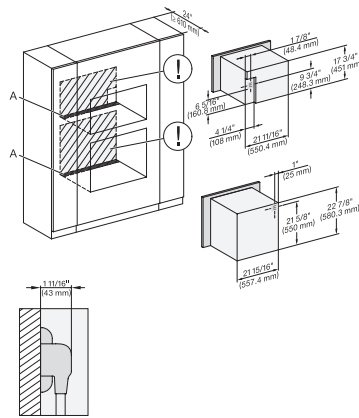

DGC7x4x(+EBA7848), H7x6xBP(+EBA7848), Installation, 30 Zoll, Proud, combi, wide front, 650S

A – Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation. – Electrical and water supplies are recommended to be placed in adjacent cabinetry. Additional cabinet depth is required when placing the electrical and water supplies behind the appliance., E = Electric connection



Handle H72xx, H76xx, H78xx, PureLine – NA7000 - Installation drawing

H2880BP, H7270BM, H7670BM, H7870BM, H7280BP, H7680BP, H7880BP, H7880BP2:, 19 11/16" / 500 mm, 17 1/2" / 444 mm, 1 7/8" / 47 mm, 15/16" / 24 mm, 1 1/4" / 32,5 mm, 2 9/16" / 65 mm, , H7240BM, H7640BM, H7840BM, H7263BP, H7660BP:, 15 3/4" / 400 mm, 14 3/16" / 360 mm, 1 7/8" / 47 mm, 15/16" / 24 mm, 1 1/4" / 32,5 mm, 2 9/16" / 65 mm