

DA 399-7 Classic

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



- Design – 35 3/8 (898) in (mm) wide trapezoidal canopy
- Powerful – ?? in Booster level
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- For perfect functionality – accessories for proper venting

EAN: 4002515802199 / Material number: 10558800 / Old Material Number: 28399750USA

Construction type	
Wall ventilation hood	•
Operating modes	
Recirculated mode	Convertible
Recirculation conversion kit (order separately)	DUW 20
OdorFree charcoal filter (order separately)	DKF 12-P
Design	
Color	Stainless steel
User convenience	
Electronic controls	•
Power levels (number excl. Intensive)	3
Programmable Intensive switch-off	•
CleanCover	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	3
Lighting	
LED	•
Number x W	2 x 3 W
Light intensity in Lx	300 lx
Color temperature in K	3000 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Extraction	
Air throughput	Values upon request
Safety	
Safety shut-off	•
Technical data	
Overall hood height for vented mode and external in inches (mm)	27 3/8 (695)–40 (1015)
Overall hood height for recirculation and external in inches (mm)	32 1/2 (825)–45 1/8 (1145)
Canopy width in in.(mm)	35 3/8 (898)
Overall min. height for vented and external in in. (mm)	27 3/8 (695)
Overall max. height for vented and external in in. (mm)	40 (1015)
Overall min. height for recirculation in in. (mm)	32 1/2 (825)
Overall max. height for recirculation in in. (mm)	45 1/8 (1145)
Canopy height in mm	4 3/4 (120)
Minimum height above electric hobs in mm	24 1/8 (610)
Canopy depth in mm	20 1/2 (520)
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Net weight in lbs. (kg)	58 (26.0)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60

DA 399-7 Classic

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.



EAN: 4002515802199 / Material number: 10558800 / Old Material Number: 28399750USA

Installation notes

Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•

Standard accessories

Non-return flap	•
-----------------	---


Optional accessories

OdorFree charcoal filter	Nein
OdorFree charcoal filter, can be reactivated	DKF 12-R

DA 399-7 Classic

Wall ventilation hood

with energy-efficient LED lighting and backlit controls for easy use.

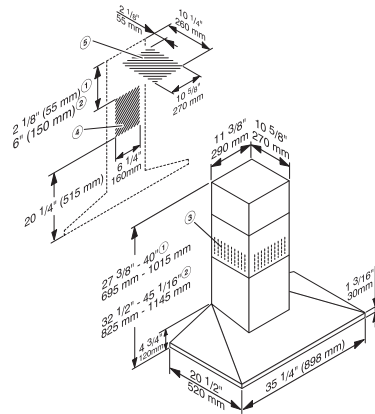

DA 399-6 (Installation drawing) – USA

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)