

DAS 2920

Built-in ventilation hood
with EasySwitch controls for convenient operation



- Classic design – stainless-steel panel, 90 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean – Miele CleanCover
- Recirculation mode – [Active AirClean](#) or [Longlife AirClean Filter](#)


EAN: 4002516495857 / Material number: 11878500 / Old Material Number: 28S2920SUSA

Construction type	
Built-in ventilation hood	•
Operating modes	
Recirculated mode	Convertible
Recirculation conversion kit (order separately)	DUU 151
Design	
Color	Stainless steel
Control panel	
Electronic controls	•
Touch controls on glass	•
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	1
Lighting	
LED ClearView lighting	•
Number x W	1 x 3,0 W
Light intensity in lx	300 lx
Color temperature in K	3500 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Safety	
Safety shut-off	•
Technical data	
Canopy width in in.(mm)	35 3/8 (896)
Canopy height in mm	1 1/2 (36)
Canopy depth in mm	10 3/4 (273)
Net weight in lbs. (kg)	36 (16.0)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Minimum distance above electric cooktops in in. (mm)	24 1/8 (610)
Minimum height above gas cooktop (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Total connected load in kW	0.35
Fuse rating in A	15
Voltage in V	120
Frequency in Hz	60
Number of phases	1
Installation notes	
Vent connection at top	•
Accessories supplied	
Non-return flap	•
Optional accessories	
OdorFree charcoal filter	Nein

DAS 2920

Built-in ventilation hood

with EasySwitch controls for convenient operation

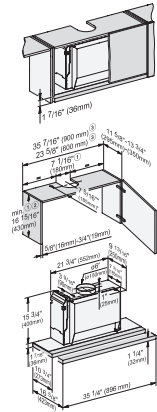

DAS2920, DAS4920, drawing – US

1) Exhaust air, mounted accessories must be taken into account for dimensions of cabinet height and cutouts., 2) Exhaust air, recirculation with DUU 150 conversion kit., 3) Installation is also possible in a 600 mm wide cabinet., , *In this installation situation, the screen is flush with the front edge of the cabinet. If the cooker hood is positioned further to the front or rear (e.g. when using a front panel), the dimensions must be adjusted accordingly.